

FIRESTORM


STEP 2: CONNECTING THE HOSE TO THE BURNER BOX AND COMPLETING ASSEMBLY

The QUICK CONNECT is used to connect the FIRESTORM to your gas supply.

Before using the unit, inspect the hose assembly for excessive wear or damage. If you notice any issues, replace the hose before operating the appliance. Contact Live Outdoor to obtain a replacement hose.

1. Tip the shell slightly to one side to allow you to pull about 18" of the VALVE CONNECTOR end of the HOSE under the BACK PANEL and inside the shell.
2. Locate the BURNER VALVE on the back of the BURNER BOX on the opposite side from the CONTROL KNOB. [Photo A1]
3. Connect the HOSE to the BURNER VALVE by pulling back the spring collar on the HOSE and pushing the VALVE CONNECTOR onto the BURNER VALVE. Confirm the connection is locked in place and secure by tugging on the hose. [Photo A2]
4. Align the CONTROL KNOB with the FRONT PANEL and then set the BURNER BOX in the shell.

For more detailed assembly instructions, please scan the QR Code on the opposite side of this tag.

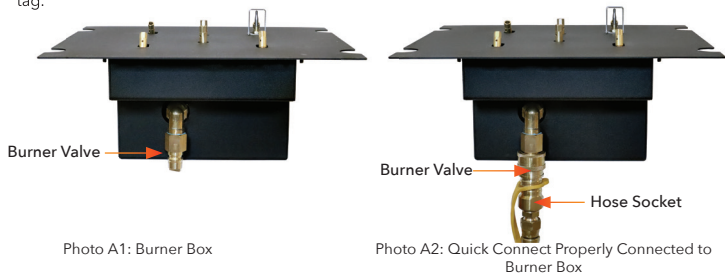

LIGHTING INSTRUCTIONS


1. Confirm that the knob on the LP tank has been fully turned to the open position.
2. Press CONTROL KNOB and turn counterclockwise to the PILOT position.
3. Using a BBQ Lighter, ignite the lighter and place next to the jet closest to the thermocouple.
4. Fully depress the CONTROL KNOB.
5. Once burner is lit, keep the CONTROL KNOB pressed in for 15 - 20 seconds. Burner should remain lit.

Tip: If you release the Ignition Button and the FIRESTORM unit turns off, start the lighting process again and hold down the ignition button for the full 20 seconds.

6. Once pilot is lit, press the CONTROL KNOB in and turn counterclockwise to achieve desired flame height.
7. If burner does not light, turn CONTROL KNOB to OFF position. Wait 3-5 minutes before repeating lighting process.

FIRESTORM

STEP 1: ASSEMBLING THE SHELL OF THE FIRESTORM

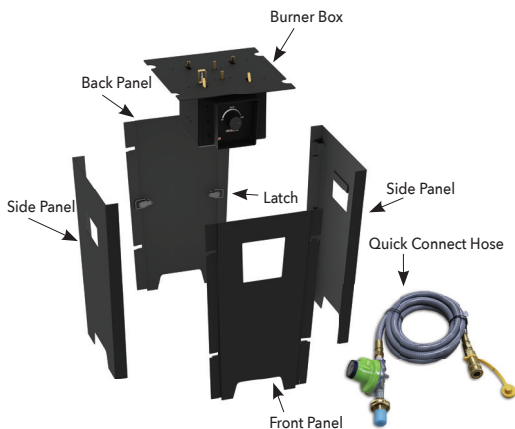

The shell of the FIRESTORM includes a FRONT PANEL, BACK PANEL, and two (2) identical SIDE PANELS.

1. Attach the BACK PANEL to one of the SIDE PANELS by sliding it into the slots on one side of the SIDE PANEL. Connect and lock the latch at the inside corner of the two panels to secure them in place.
2. Attach the FRONT PANEL to the opposite side of the same SIDE PANEL by sliding it into the slots on the SIDE PANEL. Connect and lock the latch at the inside corner of the two panels to secure them into place.
3. Attach the second SIDE PANEL by inserting the sides of the FRONT PANEL and the BACK PANEL into the slots on each side of the SIDE PANEL. Connect and lock the latches of the two inside corners of the panels to secure them into place.
4. Confirm that all four latches are connecting the four panels and are locked in place.

SCAN TO WATCH
ASSEMBLY VIDEO

