


SHS-FS / SHS30-FS

Specifications for SUBEIS HS_FS (Submersible Electroic Ignition System - High Capacity)

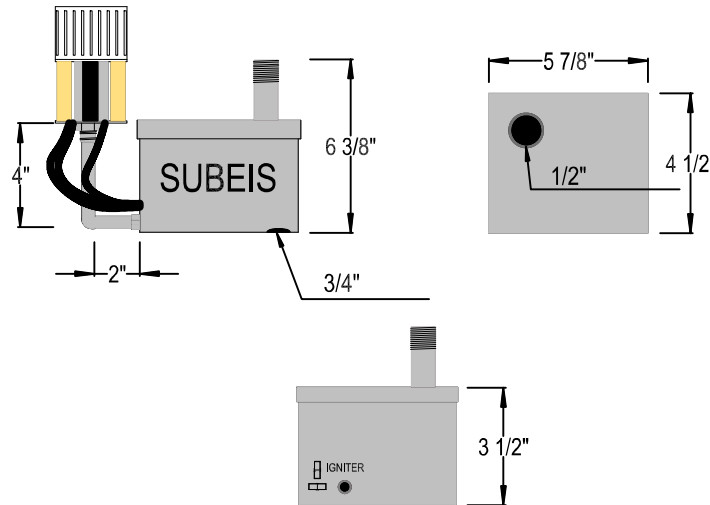

Maximum Gas Output: 780K Btu/hr

Minimum Gas Pressure: 1/2 PSI

Maximum Gas Pressure: 2 PSI

Control Box Dimensions: 5 7/8" x 4 1/2" x 3 1/2" (W x L x H)

Standard FS Fire on Water Pilot Configuration: (1) FOW PBA

Inlet / Outlet Size 3/4" FIP

Electrical Rating: 24V or 30VDC

Flame / Heat Sense: Thermopile

Ignition Type: Silicone Nitride Hot Surface Ignition (Glow Plug)